


SEAL W

FIREPROOF ACRYLIC SEALANT

- Used as a glue between PANEL product sections
- Seals small joints, formwork holes and small cable penetrations
- It has good permanent elasticity



CODES AND DIMENSIONS

CODE	content [ml]	content [US fl oz]	
SEALW	300	10,14	20

TECHNICAL DATA

Properties	value	USC units
Specific weight	1400 kg/m ³	0,81 oz/in ³
Elongation at failure	200%	-
Skin time	1 h	-
Time required for complete hardening (23 °C / 50% RH)	24 h	-
Fire resistance rating on CLT wall/floor ⁽¹⁾	EI120	-
Application temperature	-10 / 65 °C	14 / 149 °F
Storage temperature ⁽²⁾	5 / 40 °C	41 / 104 °F


⁽¹⁾EN 1366-3 and UNI EN 1366-4 standards. For full details and tested configurations, please refer to the manual or contact our technical department for updates on new tests.

⁽²⁾Store the product in vertical in a dry, covered location for no more than 12 months. Check the expiry date on the cartridge.

Waste classification (2014/955/EU): 08 04 10.

RECOMMENDATIONS FOR INSTALLATION

- 1 Spread the thixotropic paste using simple putty knives
- 2 Finish the sealed surface with a spatula

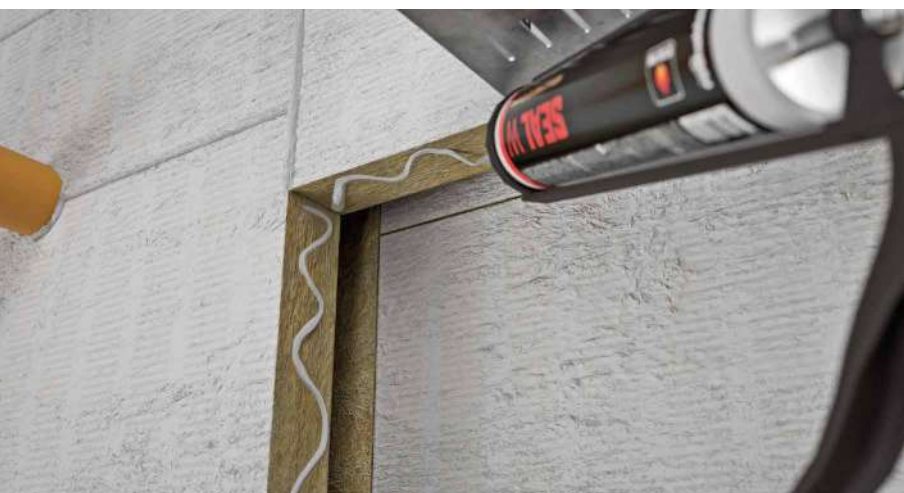

FIELDS OF APPLICATION

- cables in cable trays
- mixed penetrations
- cables in corrugated tubes
- conduit penetrations
- combustible pipes
- expansion joints
- multilayer pipes
- busbar
- insulated and non-insulated metal pipes