

# TVM

## CONNECTOR FOR DECKING

### FOUR VERSIONS

Different sizes for applications on boards with different thickness and gaps of varying width. Black version for complete concealment.

### DURABILITY

The stainless steel ensures high corrosion-resistance. The micro-ventilation between the boards helps the durability of the wooden elements.


### ASYMMETRIC GROOVING

Ideal for boards with asymmetrical "female-female" groove cuts. Ribbing on the surface of the connector ensures excellent stability.



CALCULATION  
TOOL

### BOARDS

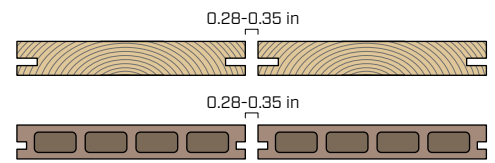

### FASTENING ON



timber



WPC



aluminium


### MATERIAL



A2 | AISI304 austenitic stainless  
steel (CRC II)



stainless steel with colored  
organic coating

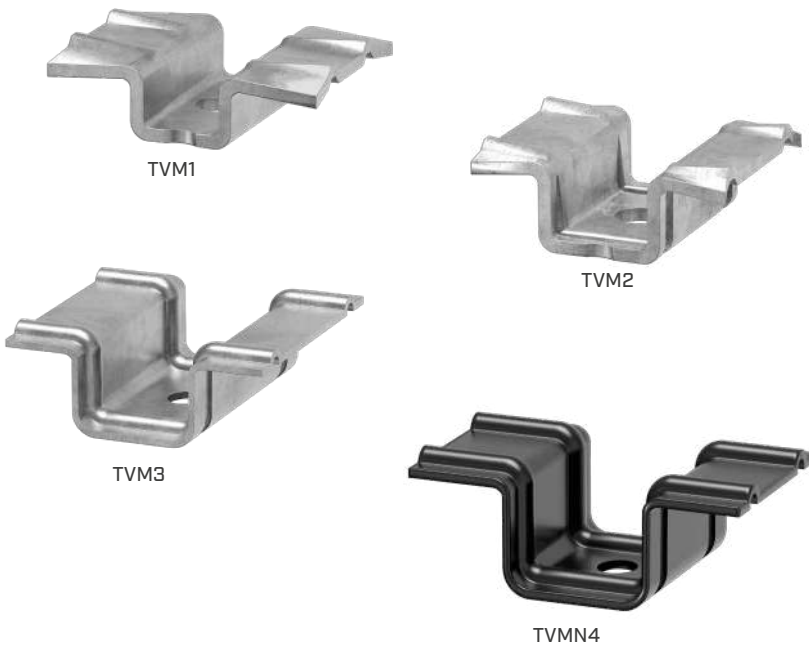

### FIELDS OF USE

Use in aggressive outdoor environments. Fastening timber or WPC boards on substructures in wood, WPC or aluminium.